

April 2016

Description

The versatile SIX can be used as a signal isolator, converter, and repeater. Ideal for installation in the plant and control room, the 2-wire (loop-powered) SIX derives its power from the process loop, eliminating the need to install an additional power supply.

Isolator—The SIX provides total isolation between the signal from a non-isolated transmitter and a receiving device. This eliminates faulty readings in process measurement and control equipment caused by ground loops, motor noise, and other electrical interference.


Converter—Acting as a precise interface, the SIX allows transmitters, transducers, controllers, recorders, and control systems with dissimilar signals to communicate with one another.

Repeater/Diverter—The SIX can be used to increase drive capability to a process loop, allowing installation of additional instruments on the loop. The SIX also is excellent for “diverting” a secondary signal from a process loop to a recorder, indicator, or other similar device.

Solves “Bucking Power Supplies”

Many plants encounter problems when trying to interface a DCS with a 4-wire (line-powered) transmitter. Both units are supplying power to the same loop, which results in “Bucking Power Supplies” and a non-functioning loop. If neither power supply can be eliminated, install a SIX between the two. It operates with powered inputs from both sides, thus restoring normal operations to the loop.

Figure 1. The SIX provides isolation between a non-isolated transmitter and a receiving device.

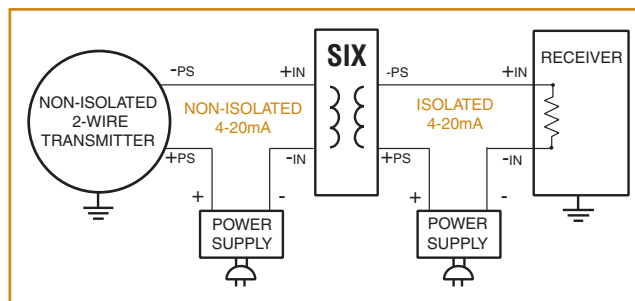

The SIX's DIN-style housing mounts quickly and easily on G-type and Top Hat rails. Removable terminal blocks speed installation and maintenance.

Features

- **Stops ground loops.** Complete isolation stops ground loops from affecting the integrity of a transmitted process signal.
- **Wide range of inputs and outputs.** Available models offer input and output combinations to handle common and unusual applications.
- **Low current impedance/high drive capability.** The SIX's exceptionally low 50 ohms (for 4-20mA input) impedance doesn't load existing loops and regenerates signals.
- **RFI/EMI protection.** Inherent 10V/m immunity protects the SIX in most applications. For especially noisy environments, choose the -RF option which provides superior 50V/m protection.

Certifications

FM Approvals (FM Global Group)
Non-Incendive
Class I, Division 2, Groups A, B, C, D

Canadian Standards Association (CSA)
General (Ordinary) Location

CE Conformant EMC Directive 2014/30/EU – EN 61326

SIX

2-Wire Signal
Isolator/Converter

Specifications

<p>Performance</p> <p>Accuracy: ±0.1% of span Linearity: ±0.1% of span Isolation: Input and output transformer isolated up to 500Vrms Maximum Input Over Range: ±60V Input Impedance: 50 ohms for 4-20mA input; 1kohms for -1mA to 1mA input 1.0Mohms for voltage inputs 10V and below Frequency Response: 10hz @ -3DB</p>	<p>Performance (continued)</p> <p>Load Capability: $\frac{V_s - 12V}{0.02A} = \text{ohms}$ Power Supply Effect: <0.05% of span over the full power supply range RFI/EMI Effect: Negligible effect @ 10V/m at popular walkie-talkie frequencies (for enhanced protection, see the -RF option)</p>	<p>Ambient Temperature</p> <p>Range: -30°C to +82°C (-22°F to +180°F) Effect: ±0.015% of span/°C change over 0-70°C range (±0.008% of span/°F over +32°F to +158°F range)</p> <p>Adjustments</p> <p>Type: External multiturn potentiometers Span: ±10% of span Zero: ±5% of span</p> <p>Weight 215 grams (7.6 ounces)</p>
---	--	---


Ordering Specifications

Unit	Input	Output	Power	Options	Housing
SIX	<p>0-20MA into 50 ohms</p> <p>4-20MA into 50 ohms</p> <p>10-50MA into ohms</p> <p>0-1MA into 1kohms</p> <p>-1TO+1mA into 1kohms</p> <p>.2-1V into 1Mohms</p> <p>0-1V into 1Mohms</p> <p>0-5V into 1Mohms</p> <p>1-5V into 1Mohms</p> <p>0-10V into 1Mohms</p> <p>-10VTO+10V into 1Mohms</p> <p>0-30V</p>	<p>4-20MA into 600 ohms with 24Vdc power supply</p> <p>10-50MA into 600 ohms with 42Vdc power supply</p>	<p>12-42DC (loop-powered on output side)</p>	<p>-BI Bailey input (must be specified with -10VTO+10V input type)</p> <p>-RF RFI/EMI protection rates 50V/m - ABC = ±0.1% F.S. when tested according to SAMA Standard PMC 33.1</p> <p>-VTD Standard Factory Calibration with NIST Test Data Report</p>	<p>DIN</p> <p>DIN-style housing mounts on 32mm G-type (EN50035) and 35mm Top Hat (EN50022) rails</p>

To order, specify: Unit / Input / Output / Power / Options [Housing]

Model Number Examples: SIX / 4-20MA / 4-20MA / 12-42DC / -RF [DIN]

Figure 2. Installation Dimensions and Terminal Designations.

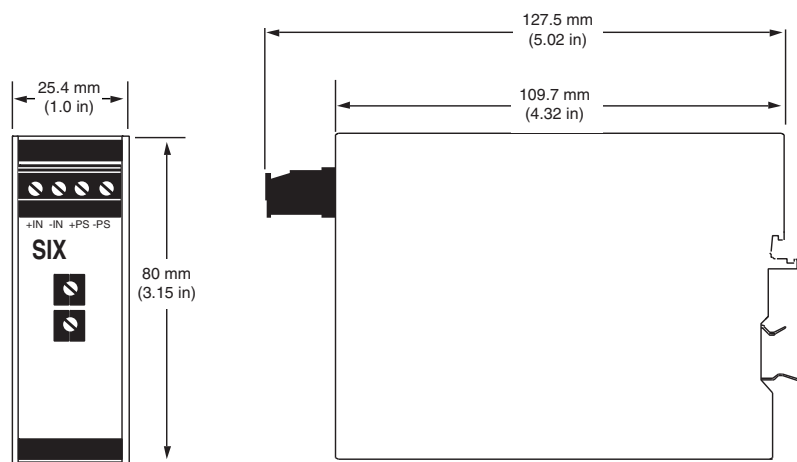

Demand Moore Reliability • www.miinet.com

United States • info@miinet.com
Tel: (818) 894-7111 • FAX: (818) 891-2816
Australia • sales@mooreind.com.au
Tel: (02) 8536-7200 • FAX: (02) 9525-7296

Belgium • info@mooreind.be
Tel: 03/448.10.18 • FAX: 03/440.17.97
The Netherlands • sales@mooreind.nl
Tel: (0)344-617971 • FAX: (0)344-615920

China • sales@mooreind.sh.cn
Tel: 86-21-62491499 • FAX: 86-21-62490635
United Kingdom • sales@mooreind.com
Tel: 01293 514488 • FAX: 01293 536852