


IEC 61508 Certified SIL 2 Capable Signal Isolator

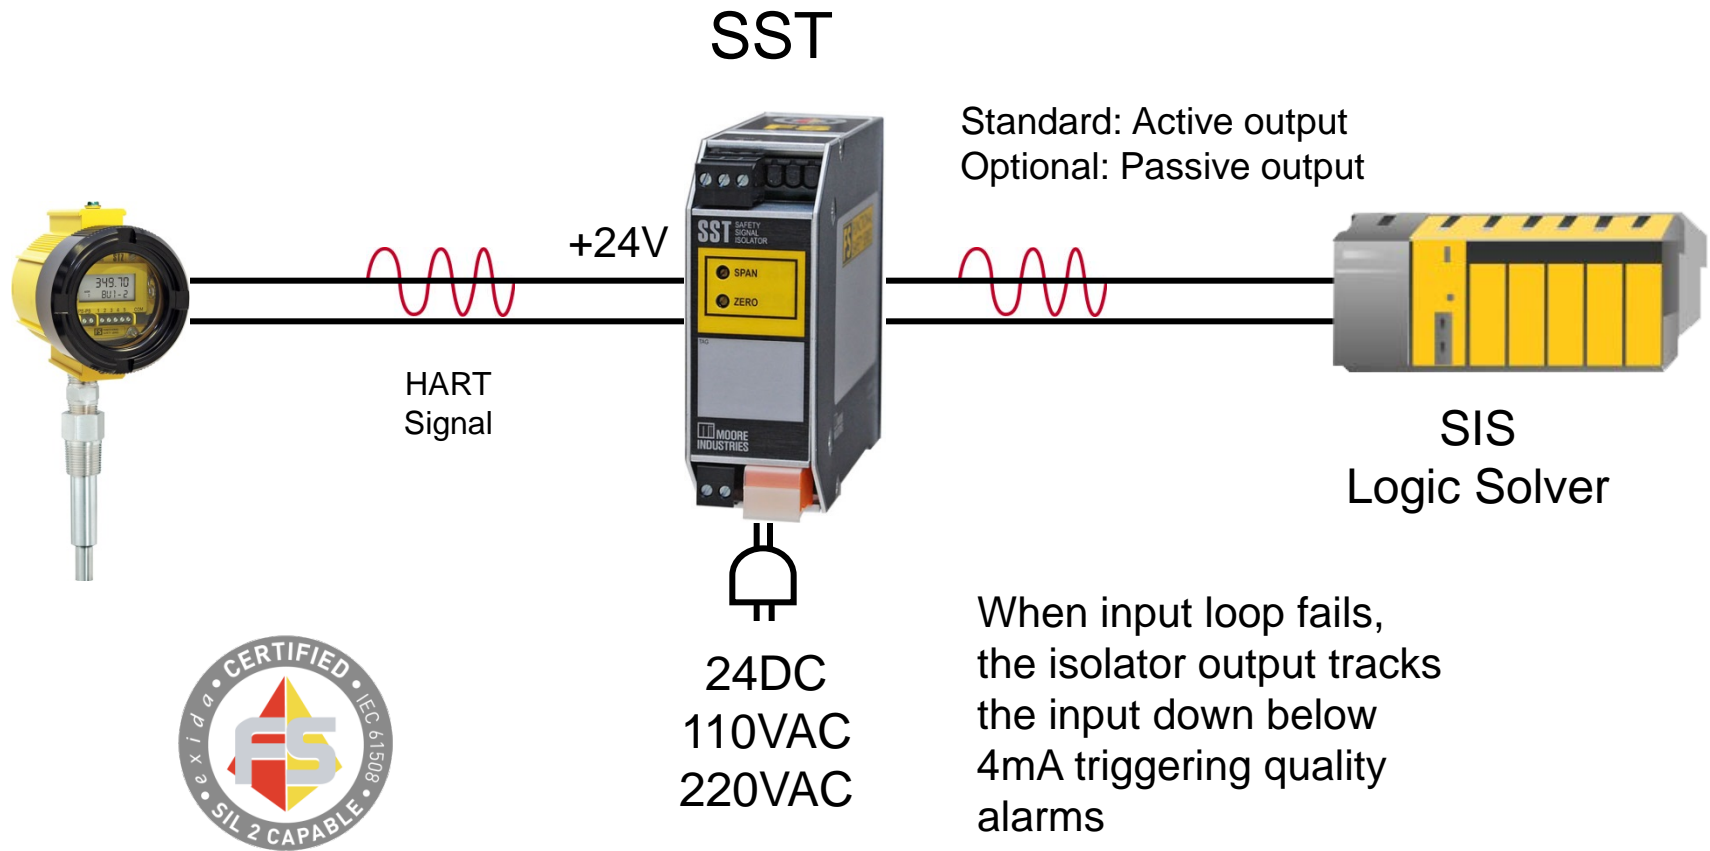

Standard: Active output
Optional: Passive output

SIS
Logic Solver

When input loop fails,
the isolator output tracks
the input down below
4mA triggering quality
alarms

