


# Remote Mounting Transmitters In Junction Boxes

If you have HART input cards available you can radically **reduce your costs** by wiring two sensors into each TT and reading them digitally

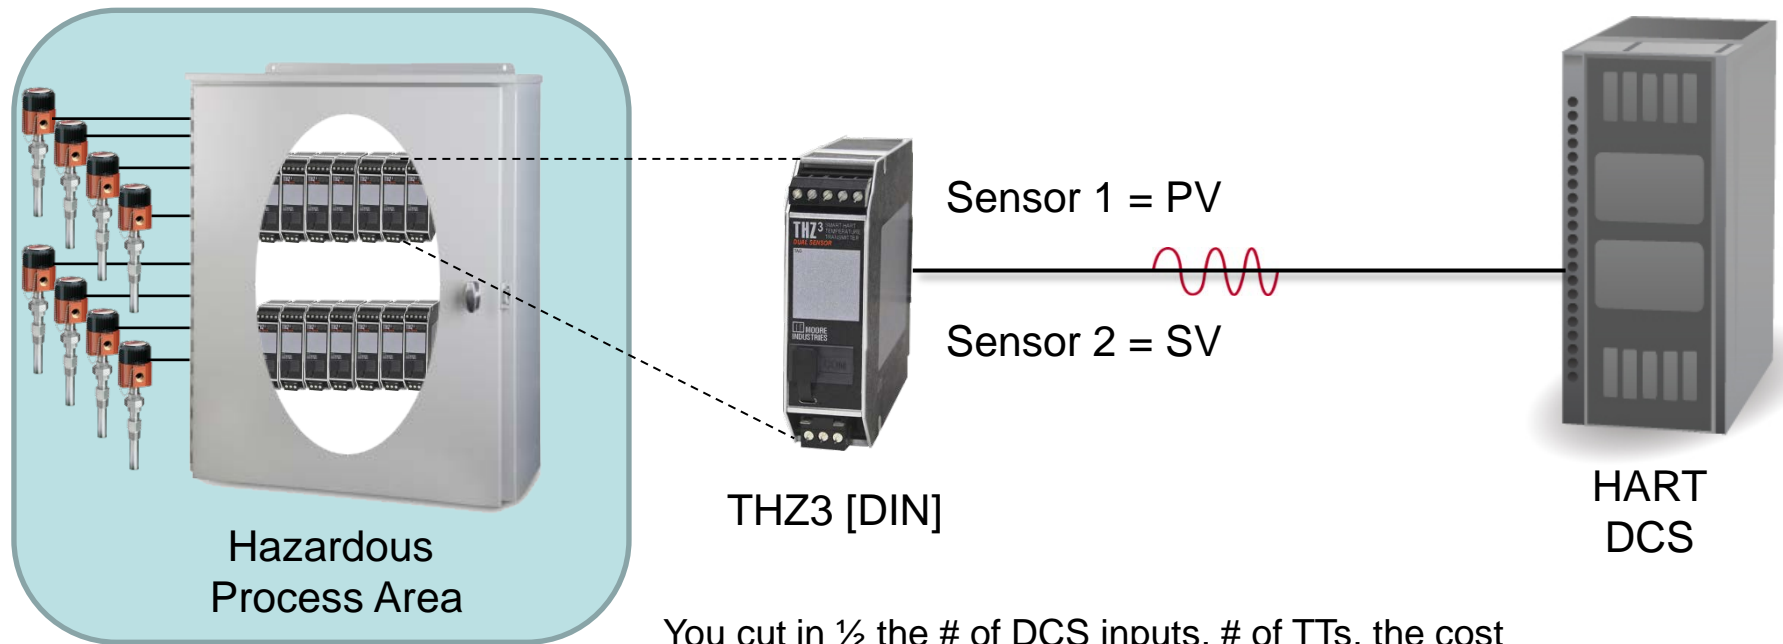

You cut in  $\frac{1}{2}$  the # of DCS inputs, # of TTs, the cost of each, the j-box space needed for the TTs & # of wires needed back to the DCS