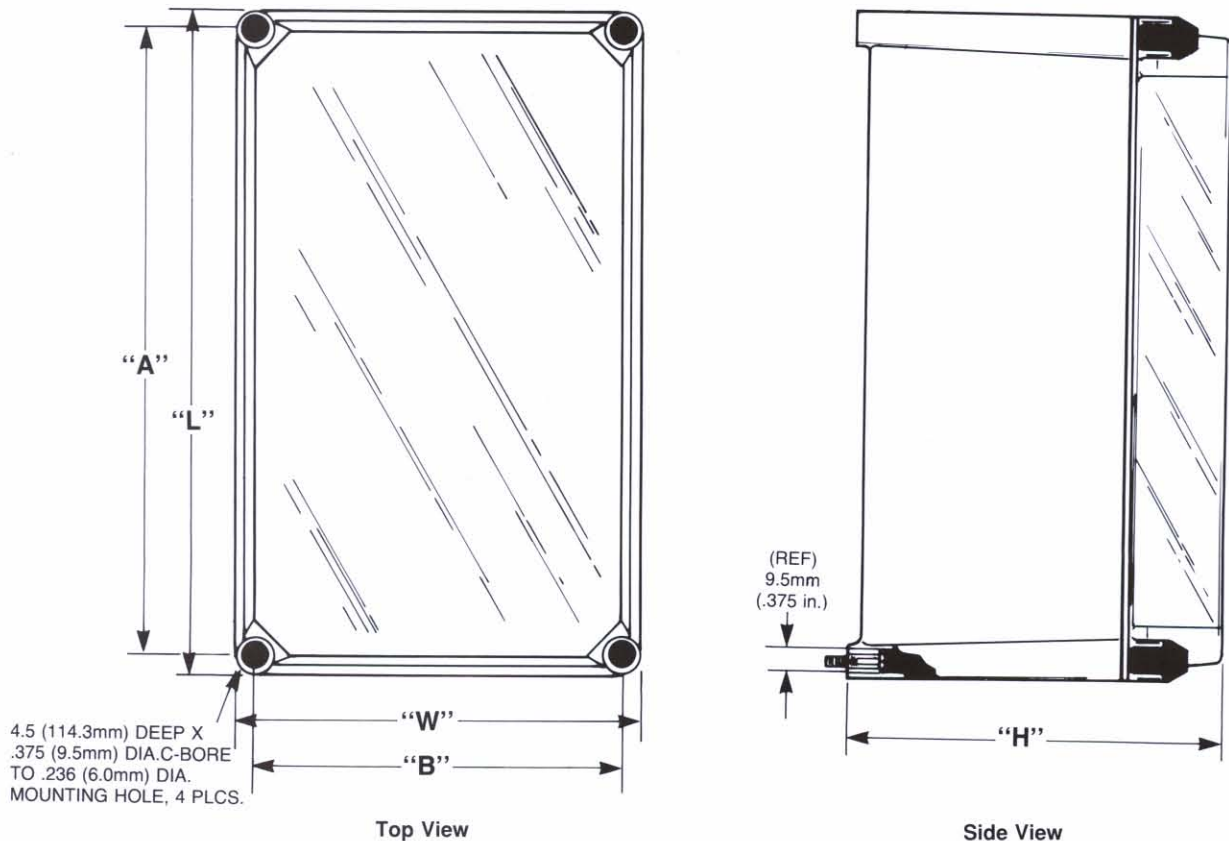


December 1990

Data Sheet 13.48



**Table 1. Enclosure Dimensions**

STD Units	"L"	"A"	"W"	"B"	"H"	Assembly PIN [AB] units in TCE
1	11.81/300.0	11.02/280.0	7.28/185.0	6.50/165.1	6.89/175.0	
2	11.81/300.0	11.02/280.0	11.81/300.0	11.02/280.0	6.89/175.0	203-235-02
3	14.57/370.0	13.78/350.0	11.81/300.0	11.02/280.0	6.89/175.0	203-235-03
4 & 5	21.85/554.9	21.06/534.9	11.81/300.0	11.02/280.0	8.27/210.0	203-235-04, 203-235-05
6	23.62/600.0	22.83/579.8	14.57/370.0	13.78/350.0	8.27/210.0	203-235-06
7-10	23.62/600.0	22.83/279.8	21.85/554.9	21.06/534.9	8.27/210.0	
<b>SMR Racks</b>						
5 & 6	14.57/370.0	13.78/350.0	11.81/300.0	11.81/300.0	9.65/245.1	
7-12	23.62/600.0	22.83/579.8	11.81/300.0	11.02/280.0	10.63/270.0	

**NOTES**

1. Enclosures are not supplied with conduit holes, fittings or knockouts.
2. TCE enclosure will withstand temperatures to 270°F and resist most acids, salts and oils.
3. Impact resistance is better than 15 foot-pounds.
4. Enclosure is listed with Underwriters Laboratories. Moore Industries units are listed with CSA.
5. Enclosure has fiberglass base, with transparent polycarbonate cover.
6. Enclosure meets NEMA 1, 2, 4, 12 specifications.